

Noże tokarskie składane - Toczanie zewnętrzne - System mocowania P

**PWLN 95°**

**Charakterystyka:**


Multipurpose toolholder equipped with trigon negative double side insert (angle 80°) with strong cutting edge. The lever lock ensures good rigidity and chip flow in roughing applications.

**Zastosowanie:**

External turning toolholder for general applications, roughing, semi-finishing and finishing.



Axial: -6°  
Radial: -6°

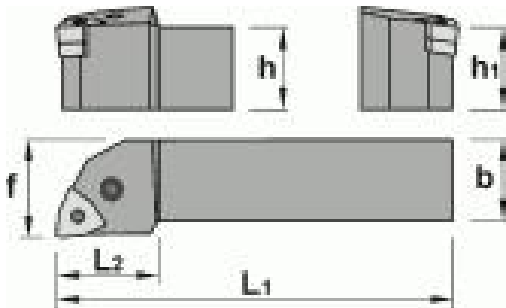

PWLN 95°	h=h1	b	L1	L2	f	Rozmiar płytek	Waga	Cena
PWLN 1616 H 06 prawy	16	16	100	15	20	WNM.. 0604..	0,3	127,20 PLN
PWLN 1616 H 06 lewy	16	16	100	15	20	WNM.. 0604..	0,3	127,20 PLN
PWLN 2020 K 06 prawy	20	20	125	25	25	WNM.. 0604..	0,4	135,20 PLN
PWLN 2020 K 06 lewy	20	20	125	25	25	WNM.. 0604..	0,4	135,20 PLN
PWLN 2525 M 06 prawy	25	25	150	25	32	WNM.. 0604..	0,8	151,20 PLN
PWLN 2525 M 06 lewy	25	25	150	25	32	WNM.. 0604..	0,8	151,20 PLN
PWLN 2020 K 08 prawy	20	20	125	34	25	WNM.. 0804..	0,4	135,20 PLN

PWLNL 2020 K 08 lewy	20	20	125	34	25	WNM.. 0804..	0,4	135,20 PLN
PWLNR 2525 M 08 prawy	25	25	150	34	32	WNM.. 0804..	0,8	151,20 PLN
PWLNL 2525 M 08 lewy	25	25	150	34	32	WNM.. 0804..	0,8	151,20 PLN
PWLNR 3225 P 08 prawy	25	32	170	34	32	WNM.. 0804..	1,1	160,00 PLN
PWLNL 3225 P 08 lewy	25	32	170	34	32	WNM.. 0804..	1,1	160,00 PLN
PWLNR 3232 P 08 prawy	32	32	170	34	40	WNM.. 0804..	1,3	208,00 PLN
PWLNL 3232 P 08 lewy	32	32	170	34	40	WNM.. 0804..	1,3	208,00 PLN

Gdańska 10  
70-660 Szczecin  
\* Telefon: +48 91 489 63 62  
\* Telefon: +48 500 189 009  
\* Fax: +48 91 462 30 00  
\* E-mail: [baltictool@baltictool.com](mailto:baltictool@baltictool.com)

10-03-2010