

Noże tokarskie składane - Toczanie zewnętrzne - System mocowania P

PTDN 45°



Charakterystyka:


Toolholder for external turning and chamfering applications equipped with triangular negative inserts and strong cutting edges.

The lever lock ensures good rigidity and chip flow in roughing applications.

Zastosowanie:

External turning and chamfering toolholder for general applications, roughing, semi-finishing, and finishing.

Axial: -5°
Radial: -5°

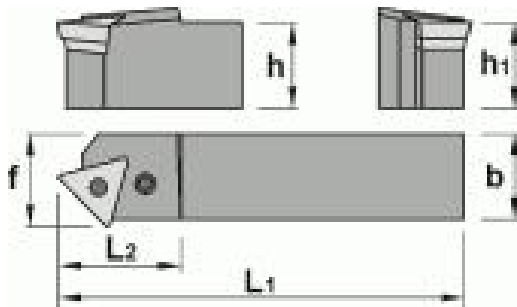

PTDN 45°	h=h1	b	L1	L2	f	Rozmiar płytek	Waga	Cena
PTDNR 2525 M 22 prawy	25	25	150	34	27	TNM.. 2204..	0,8	151,20 PLN
PTDNL 2525 M 22 lewy	25	25	150	34	27	TNM.. 2204..	0,8	151,20 PLN
PTDNR 3225 P 22 prawy	32	25	170	34	27	TNM.. 2204..	1,1	164,00 PLN
PTDNL 3225 P 22 lewy	32	25	170	34	27	TNM.. 2204..	1,1	164,20 PLN

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

11-03-2010