

Noże tokarskie składane - Toczenie zewnętrzne - System mocowania C

CTDP 45°

Charakterystyka:


Toolholder for external turning and chamfering turning applications equipped with triangular positive inserts and strong cutting edges. The top clamp ensures good rigidity and stability.

Zastosowanie:

External turning and chamfering toolholder for all kind of materials. The workpiece should be stable



Axial: 4.25°
Radial: 4.25°

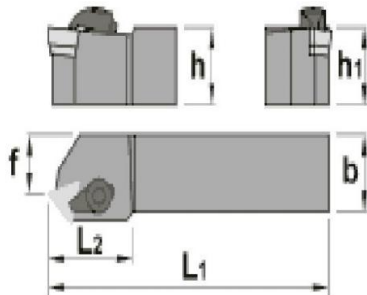

CTDP 45°	h=h1	b	L1	L2	f	Rozmiar płytek	Waga	Cena
CTDP R 1212 F 11 prawy	12	12	80	18	6,3	TP..1103..	0,1	88,00 PLN
CTDP L 1212 F 11 lewy	12	12	80	18	6,3	TP..1103..	0,1	88,00 PLN
CTDP R 1616 H 11 prawy	16	16	100	22	10,3	TP..1103..	0,2	96,00 PLN
CTDP L 1616 H 11 lewy	16	16	100	22	10,3	TP..1103..	0,2	96,00 PLN
CTDP R 2020 K 16 prawy	20	20	125	28	12,2	TP..1603..	0,4	128,00 PLN
CTDP L 2020 K 16 lewy	20	20	125	28	12,2	TP..1603..	0,4	128,00 PLN
CTDP R 2525 M 16 prawy	25	25	150	28	17,2	TP..1603..	0,7	144,00 PLN

CTDP L 2525 M 16 lewy	25	25	150	28	17,2	TP..1603..	0,7	144,00 PLN
CTDP R 3232 P 16 prawy	32	32	170	28	23,5	TP..1603..	1,3	184,00 PLN
CTDP L 3232 P 16 lewy	32	32	170	28	23,5	TP..1603..	1,3	184,00 PLN
CTDP R 3232 P 22 prawy	32	32	170	34	20,5	TP..2204..	1,3	184,00 PLN
CTDP L 3232 P 22 lewy	32	32	170	34	20,5	TP..2204..	1,3	184,00 PLN

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

12-03-2010