

Noże tokarskie składane - Toczanie zewnętrzne - System mocowania P

PTTN 60°



Charakterystyka:


Toolholder for external turning and chamfering applications equipped with triangular negative inserts and strong cutting edges.

The lever lock ensures good rigidity and chip flow in roughing applications.

Zastosowanie:

External turning and chamfering toolholder for general applications, roughing, semi-finishing and finishing.

Axial: -8°
Radial: -2,25°

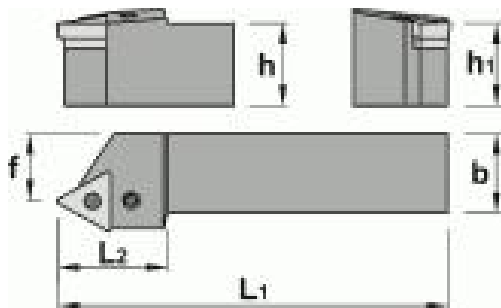

PTTN 60°	h=h1	b	L1	L2	f	Rozmiar płytek	Waga	Cena
PTTNR 1616 H 16 prawy	16	16	100	25	13	TNM.. 1604..	0,3	127,20 PLN
PTTNL 1616 H 16 lewy	16	16	100	25	13	TNM.. 1604..	0,3	127,20 PLN
PTTNR 2020 K 16 prawy	20	20	125	28	17	TNM.. 1604..	0,4	135,20 PLN
PTTNL 2020 K 16 lewy	20	20	125	28	17	TNM.. 1604..	0,4	135,20 PLN
PTTNR 2525 M 16 prawy	25	25	150	28	22	TNM.. 1604..	0,8	151,20 PLN
PTTNL 2525 M 16 lewy	25	25	150	28	22	TNM.. 1604..	0,8	151,20 PLN

PTTNR 2525 M 22 prawy	25	25	150	34	22	TNM.. 2204..	0,8	151,20 PLN
PTTNL 2525 M 22 lewy	25	25	150	34	22	TNM.. 2204..	0,8	151,20 PLN
PTTNR 3225 P 22 prawy	32	25	170	34	22	TNM.. 2204..	1,1	164,00 PLN
PTTNL 3225 P 22 lewy	32	25	170	34	22	TNM.. 2204..	1,1	164,00 PLN

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

12-03-2010