

Noże tokarskie składane - Toczanie zewnętrzne - System mocowania S

SRDC




Charakterystyka:

Profiling toolholder equipped with round positive insert with strong cutting edge.
The center screw ensures good rigidity and chip flow.

Zastosowanie:

Profiling turning toolholder for general applications, roughing, semi-finishing and finishing.

Axial: 0°
Radial: 0°

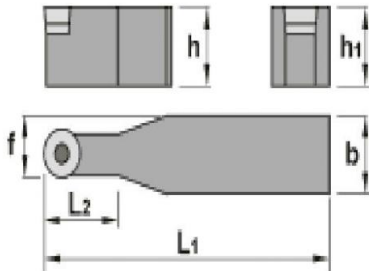

SRDC	h=h1	b	L1	L2	f	Rozmiar płytek	Waga	Cena
SRDC N 1010 E 06	10	10	70	10	8,0	RC..0602M0	0,1	88,00 PLN
SRDC N 1212 F 06	12	12	80	12	11,0	RC..0602M0	0,1	89,60 PLN
SRDC N 1616 H 06	16	16	100	16	13,0	RC..0602M0	0,2	96,00 PLN
SRDC N 2020 K 06	20	20	125	20	15,0	RC..0602M0	0,4	136,00 PLN
SRDC N 2525 M 06	25	25	150	25	17,5	RC..0602M0	0,7	144,00 PLN
SRDC N 1616 H 08	16	16	100	16	13,0	RC..0803M0	0,2	96,00 PLN
SRDC N 2020 K 08	20	20	125	20	15,0	RC..0803M0	0,4	136,00 PLN

SRDC N 2525 M 08	25	25	150	25	17,5	RC..0803M0	0,7	144,00 PLN
SRDC N 2020 K 10	20	20	125	22	15,0	RC..10T3M0	0,4	136,00 PLN
SRDC N 2525 M 10	25	25	150	22	17,5	RC..10T3M0	0,7	144,00 PLN
SRDC N 2525 M 12	25	25	150	28	18,5	RC..1204M0	0,7	144,00 PLN
SRDC N 3225 P 12	32	25	170	28	18,5	RC..1204M0	0,9	192,00 PLN
SRDC N 3232 P 12	32	32	170	28	22,0	RC..1204M0	1,2	200,00 PLN

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

14-03-2010