

Narzędzia frezerskie składane - Frezy czołowe 45, 75

BT2956.01 42°



Charakterystyka:


Multipurpose milling cutter with 42° entering angle that decreases cutting forces and allows a quick feed in a limited capacity machine.

Every insert pocket is checked point by point to improve the insert life.

The insert thickness is 4,76 mm and Torx screws allow a good chip evacuation.

Zastosowanie:

This face milling cutter works well on steels, stainless steel, alloyed steels, cast iron and aluminium alloys.

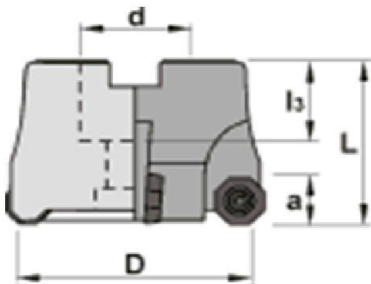

BT2956.01 42°	Ilość płytek	D	L	d	I3	a	Rozmiar płytek	Waga	Cena
BT2956.01-040	4	40	40	16	20	5	ODM..0404..	0,3	315,17 PLN
BT2956.01-050	4	50	40	22	22	5	ODM..0404..	0,4	320,88 PLN
BT2956.01-063	5	63	50	25	25	5	ODM..0404..	0,7	380,46 PLN
BT2956.01-080	6	80	50	26	26	5	ODM..0404..	1,2	493,81 PLN
BT2956.01-100	7	100	50	29	29	5	ODM..0404..	1,9	633,14 PLN
BT2956.01-125	7	125	63	29	29	5	ODM..0404..	3,6	836,68 PLN
BT2956.01-160	8	160	63	29	29	5	ODM..0404..	4,7	1 057,45 PLN

BT2956.01-200	10	200	63	40	40	5	ODM..0404..	8,2	1 352,40 PLN
---------------	----	-----	----	----	----	---	-------------	-----	--------------

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

11-02-2012