

Narzędzia frezerskie składane - Frezy czołowe 45, 75

BT2957.00 42°




Charakterystyka:

Multipurpose milling cutter with 42° entering angle that decreases cutting forces and allows a quick feed in a limited capacity machine. Every insert pocket is checked point by point to improve the insert life. The indexable cartridges protect the milling cutter body in case of accident. The insert thickness is 5,55 mm and Torx screws allow a good chip evacuation.

Zastosowanie:

This face milling cutter works well on steels, stainless steel, alloyed steels, cast iron and aluminium alloys.

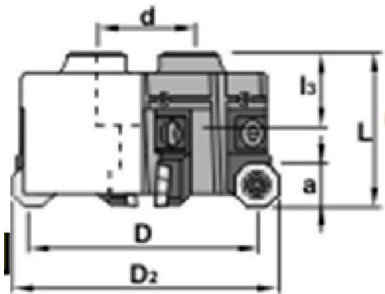

BT2957.00 42°	Ilość płytek	D	L	d	I3	a	Rozmiar płytek	Waga	Cena
BT2957.00-160	10	160	63	40	30	8	ODM..0605..	5,0	2 965,59 PLN
BT2957.00-200	12	200	63	60	40	8	ODM..0605..	7,3	3 764,32 PLN
BT2957.00-250	16	250	63	60	40	8	ODM..0605..	12,1	5 806,75 PLN
BT2957.00-315	20	315	63	60	40	8	ODM..0605..	31,0	8 278,82 PLN
BT2957.00-400	22	400	63	60	40	8	ODM..0605..	47,5	10 324,16 PLN
BT2957.00-500	28	500	63	60	40	8	ODM..0605..	85,0	14 247,38 PLN

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

11-02-2012