

Noże tokarskie składane - Toczenie zewnętrzne - System mocowania M

MCLN 95°



Charakterystyka:

Multipurpose toolholder equipped with rhombic negative double side insert (angle 80°) with strong cutting edge.

The center pin and top clamp ensure good rigidity and stability in roughing applications.

Zastosowanie:


External turning toolholder for general applications, roughing, semi-finishing and finishing.

Not suitable for cermet, ceramic and K10, P10 grade inserts.

For low powered machines and small pieces choose toolholder.

Axial: -8°

Radial: -6,5°

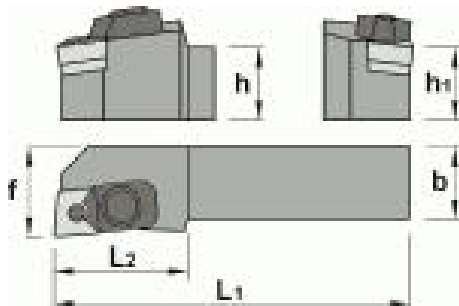

MCLN 95°	h1	b	L1	L2	f	Rozmiar płytek	Waga	Cena
MCLNR 2020 K 12 prawy	20	20	125	34	25	CN.. 1204..	0,5	144,00 PLN
MCLNL 2020 K 12 lewy	20	20	125	34	25	CN.. 1204..	0,5	144,00 PLN
MCLNR 2525 M 12 prawy	25	25	150	34	32	CN.. 1204..	0,8	160,00 PLN

MCLNL 2525 M 12 lewy	25	25	150	34	32	CN.. 1204..	0,8	160,00 PLN
MCLNR 3225 P 12 prawy	32	25	170	34	32	CN.. 1204..	1,2	192,00 PLN
MCLNL 3225 P 12 lewy	32	25	170	34	32	CN.. 1204..	1,2	192,00 PLN
MCLNR 2525 M 19 prawy	25	25	150	42	32	CN.. 1906..	0,8	160,00 PLN
MCLNL 2525 M 19 lewy	25	25	150	42	32	CN.. 1906..	0,8	160,00 PLN
MCLNR 3225 P 19 prawy	32	25	170	42	32	CN.. 1906..	1,2	192,00 PLN
MCLNL 3225 P 19 lewy	32	25	170	42	32	CN.. 1906..	1,2	192,00 PLN
MCLNR 4040 S 19 prawy	40	40	250	42	50	CN.. 1906..	3,1	252,00 PLN
MCLNL 4040 S 19 lewy	40	40	250	42	50	CN.. 1906..	3,1	252,00 PLN

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

11-03-2010