

Noże tokarskie składane - Toczanie zewnętrzne - System mocowania C

CSTP 60°




Charakterystyka:

Toolholder for external turning applications equipped with square positive inserts and strong cutting edges. The top clamp ensures good rigidity and stability.

Zastosowanie:

External turning toolholder for all kind of materials. The workpiece should be stable.

Axial: 3°
Radial: 5.25°

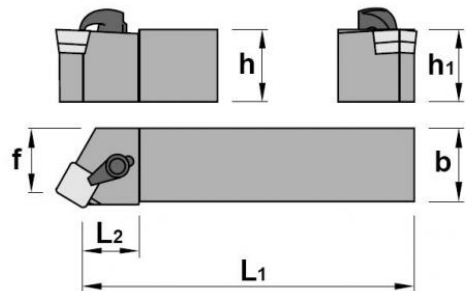

| CSTP 60° | h=h1 | b | L1 | L2 | f | Rozmiar płytek | Waga | Cena |
|-----------------------|------|----|-----|----|----|----------------|------|------------|
| CSTPR 1616 H 09 prawy | 16 | 16 | 100 | 22 | 13 | SP..0903.. | 0,2 | 96,00 PLN |
| CSTPL 1616 H 09 lewy | 16 | 16 | 100 | 22 | 13 | SP..0903.. | 0,2 | 96,00 PLN |
| CSTPR 2020 K 09 prawy | 20 | 20 | 125 | 22 | 17 | SP..0903.. | 0,4 | 128,00 PLN |
| CSTPL 2020 K 09 lewy | 20 | 20 | 125 | 22 | 17 | SP..0903.. | 0,4 | 128,00 PLN |
| CSTPR 2020 K 12 prawy | 20 | 20 | 125 | 28 | 17 | SP..1203.. | 0,4 | 128,00 PLN |
| CSTPL 2020 K 12 lewy | 20 | 20 | 125 | 28 | 17 | SP..1203.. | 0,4 | 128,00 PLN |
| CSTPR 2525 M 12 prawy | 25 | 25 | 150 | 28 | 22 | SP..1203.. | 0,7 | 144,00 PLN |

| | | | | | | | | |
|----------------------|----|----|-----|----|----|------------|-----|------------|
| CSTPL 2525 M 12 lewy | 25 | 25 | 150 | 28 | 22 | SP..1203.. | 0,7 | 144,00 PLN |
|----------------------|----|----|-----|----|----|------------|-----|------------|

Gdańska 10
70-660 Szczecin
* Telefon: +48 91 489 63 62
* Telefon: +48 500 189 009
* Fax: +48 91 462 30 00
* E-mail: baltictool@baltictool.com

12-03-2010